

► 350 ICLEAN

SWITCH FOR FORCED FILTER CLEANING

TANGENTIAL INLET FOR BETTER DUST SEPARATION FROM THE FILTER

STORAGE CONTAINER



3 BY-PASS COLLECTOR MOTORS

FULLY AUTOMATIC FILTER CLEANING
CONSTANT AND ENDLESS SUCTION
NR 3 HEPA FILTERS + PTFE MEMBRANE


TANK QUICK RELEASE FOR FAST DISPOSAL



The 350 ICLEAN the vacuum cleaner 3-phase motors for excellence. Model most appreciated by those who use it in their daily work, especially in the field of treatment of surfaces.

It is the most efficient single phase extractor of the world for the extraction of dust, resulting from production machines such as sanders. Its field of application is not limited to construction, but spans multiple industries where dust represents a difficult problem for conventional industrial vacuums.

WORK EFFICIENCY

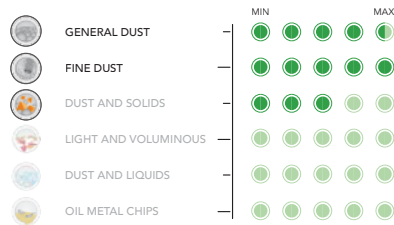

TYPE OF APPLICATION

FINE DUST

TECHNICAL DATAS

iclean	350
MOTORIZATION	nr 3 By-pass
POWER	3300 W
VOLTAGE	230 V ⚡
FREQUENCY	50 Hz
FILTER SHAKER	AUTO
FILTER CLASS	HEPA
AIR FLOW	510 m3/h
MAX DEPRESSION	230 mBar
CAPACITY	50 L
DIMENSIONS	80X60 h 118 cm
WEIGHT	65 Kg

VOLTAGES AVAILABLE : 120 V - 60 HZ • 220 V - 60 HZ • 110 V - 50 HZ

► 350 BAG ICLEAN


SWITCH FOR FORCED FILTER CLEANING

TANGENTIAL INLET FOR BETTER DUST SEPARATION FROM THE FILTER

STORAGE CONTAINER

BIGGER REAR WHEELS

LONGOPAC® CONTINUOUS BAG COLLECTION SYSTEM 22 METERS

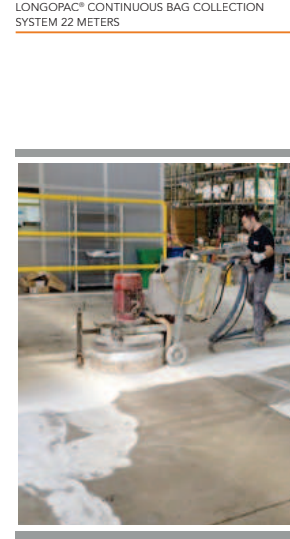

3 BY-PASS COLLECTOR MOTORS


FULLY AUTOMATIC FILTER CLEANING
CONSTANT AND ENDLESS SUCTION
NR 3 HEPA FILTERS + PTFE MEMBRANE

TANK QUICK RELEASE FOR FAST DISPOSAL



The 350 BAG ICLEAN is the version of 350 ICLEAN equipped with LONGOPAC® collection system. With this system the disposal of the vacuumed material is facilitated by the use of collection bags, which once sealed do not allow the dispersing of contaminants particles in the environment, representing a further safety for the operator's health. This special continuous bag is made from a very resistant plastic tube of 22 meters length. Its characteristic is that of being able to stow the material aspirated creating different sized bags and variable weight, avoiding direct contact with the aspirated dust.

WORK EFFICIENCY

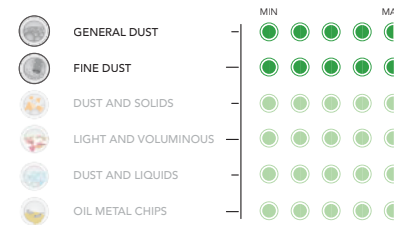

TYPE OF APPLICATION

FINE DUST

TECHNICAL DATAS

iclean	350 BAG
MOTORIZATION	nr 3 By-pass
POWER	3300 W
VOLTAGE	230 V ⚡
FREQUENCY	50 Hz
FILTER SHAKER	AUTO
FILTER CLASS	HEPA
AIR FLOW	510 m3/h
MAX DEPRESSION	230 mBar
HARVESTING SYSTEM	LONGOPAC®
DIMENSIONS	73X60 h 157 cm
WEIGHT	83 Kg

VOLTAGES AVAILABLE : 120 V - 60 HZ • 220 V - 60 HZ • 110 V - 50 HZ

DEGREE OF SPECIFICITY

●●●●●

●●●●●